

Special Features

- Used AA Battery.
- Small Size.
- Voltage: 4.5V
- Timer Control:
6Hrs/ON, 18Hrs/OFF
- Flash Control.
- Waterproof Box




RoHS



Battery Live

- | | |
|-----------|-----------|
| ● 35 LED | ○ 50 Days |
| ● 70 LED | ○ 25 Days |
| ● 100 LED | ○ 17 Days |
| ● 200 LED | ○ 10 Days |

Mechanical Drawing

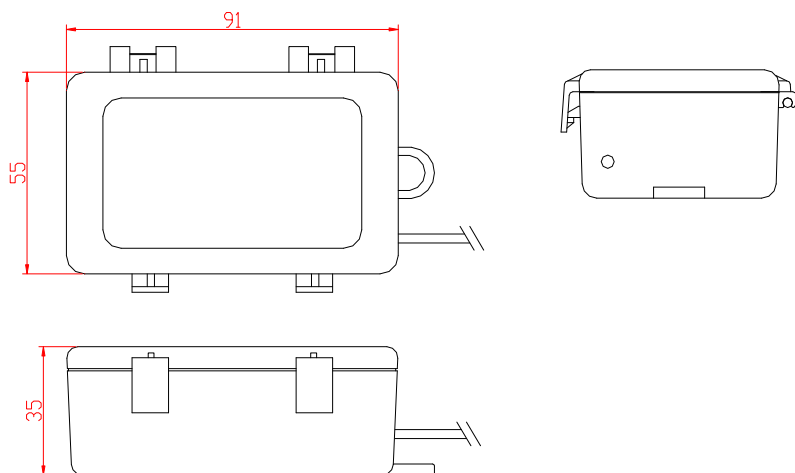

Notes:

1. Dimensions shown in mm as left.
2. Size: 91 x 55x 35mm (+/-1.0mm)
3. DC Socket: 01.

Environment

Operating temperature : -20° to 40°C

Storage temperature : -20°C to +80°C

Operating Humidity : 20% to 80% RH.

Storage Humidity : 5% to 95% RH

Vibration:

Three orthogonal axes, sweep at 1 oct/min,
5 min. dwell at four

major resonances 0.75G peak 5Hz to
500Hz, operational.

Contact Information

WEBSITE: WWW.PHIPOL.COM
SALES E-MAIL: Sales.phipol@gmail.com
info@hipol.com