

Special Features

- Universal Input Voltage range
- High Efficiency and Reliability
- Small size and low profile
- AC inlet: C14
- High power density
- Low lose in empty load
- Low output ripple
- MTBF demonstrated: >30,000 hours



Electrical Specs

Input

- Input voltage ○ 90~264 VAC
- Frequency ○ 47-63 Hz
- Input Current ○ 1.5A @Vin90Vac full load
- Inrush Current ○ 30/60A Max @Vin110/230Vac, Cold start
- Efficiency ○ 80% min
- Leakage Current ○ <0.75mA @ 50/60 Hz.

Output

- Maximum power ○ 60W max
- Hold Up Time ○ ≥10 msec 240Vac input voltage
- Overload protection ○ ≤ 150% @ all input voltage
- Over shoot ○ ≤10% of normal voltage value.
- SCP ○ short circuited protection and with auto- recovery function

Environment

- Operating temperature : 0° to 40°C
- Storage temperature : -20°C to +80°C
- Operating Humidity : 20% to 80% RH.
- Storage Humidity : 5% to 95% RH

Vibration:
Three orthogonal axes, sweep at 1 oct/min,
5 min. dwell at four
major resonances 0.75G peak 5Hz to
500Hz, operational.

Contact Information

WEBSITE: WWW.PHIPOL.COM
SALES E-MAIL: Sales.phipol@gmail.com
info@phipol.com

Safety


- UL/CUL (UL60950-1)
- CE (EN60950-1)
- CCC
- EMC standard: EN55022 and FCC part 15 (class B)



Ordering Information

Part Number	Input Volts	Output Volts	Road	Max Power	Regulation	Ripple P/P (PARD)
VA60A-XXXXYY	100~240 Vac	12-24V	0-5A	60 W	± 5%	120-240mV
VA60B-XXXXYY	100~240 Vac	12-24V	0-5A	60 W	± 5%	120-240mV

Mechanical Drawing

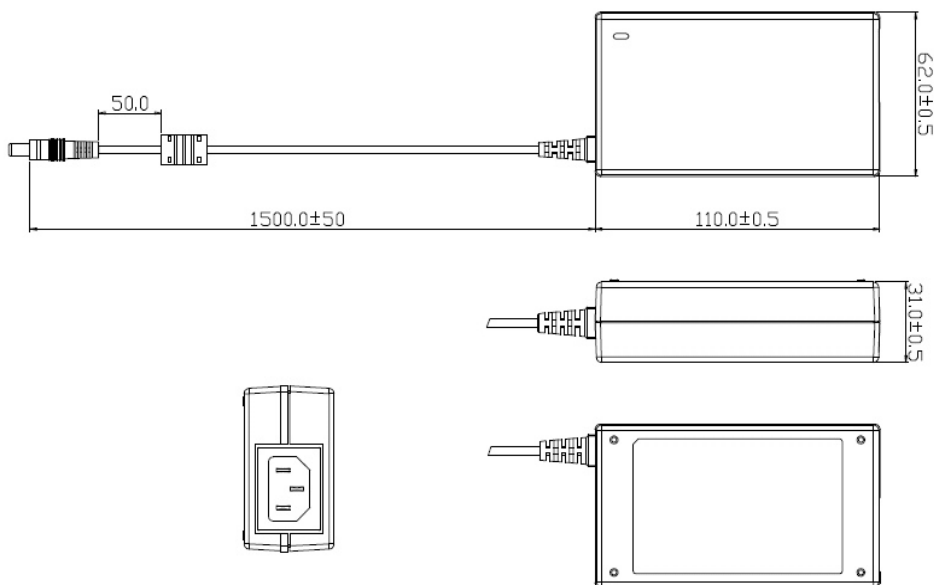

Notes:

1. Dimensions shown in mm as left.
2. Size: 110 x 62x 31mm (+/-1.0mm)
3. AC inlet and DC cable: Of your choice.



Concentric Barrel Plug		
A (OD)	B (ID)	C (L)
6.5	3.0	8~14
5.5	2.5	8~14
5.5	2.1	8~14
5.0	2.5	8~14
5.0	2.1	8~14
3.8	1.35	8~14
3.8	1.05	8~14
3.5	1.35	7~14